

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

SITRANS P200 for gauge and absolute pressure

1

Overview



The SITRANS P200 pressure transmitter measures the gauge and absolute pressure of liquids, gases and vapors.

- Ceramic measuring cell
- Gauge and absolute measuring ranges 1 to 60 bar (15 to 1000 psi)
- For general applications

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design

Application

The SITRANS P200 pressure transmitter for gauge and absolute pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design

Device structure without explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a device plug M12 (IP67), a cable (IP67) or a Quickon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.


Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a device plug M12 (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge and absolute pressure of liquids and gases as well as the level of liquids.

Mode of operation

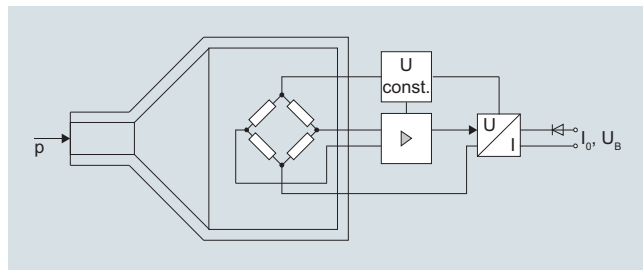

SITRANS P200 pressure transmitters (7MF1565-...), functional diagram

The ceramic measuring cell has a thick-film resistance bridge to which the operating pressure p is transmitted through a ceramic diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Technical specifications

Application		Electromagnetic compatibility	
Gauge and absolute pressure measurement	Liquids, gases and vapors		• acc. IEC 61326-1/-2/-3 • acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation $\leq 1\%$
Mode of operation		Design	
Measuring principle	Piezo-resistive measuring cell (ceramic diaphragm)	Weight	Approx. 0.090 kg (0.198 lb)
Measured variable	Gauge and absolute pressure	Process connections	See dimension drawings
Inputs		Electrical connections	• Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 • Device plug M12 • 2 or 3-wire (0.5 mm²) cable ($\varnothing \pm 5.4$ mm) • Quickon cable quick screw connection
Measuring range		Wetted parts materials	
• Gauge pressure - Metric - US measuring range	1 ... 60 bar (15 ... 870 psi) 15 ... 1000 psi	• Measuring cell • Process connection • Gasket	Al ₂ O ₃ - 96 % Stainless steel, mat. No. 1.4404 (SST 316 L) • FPM (Standard) • Neoprene • Perbunan • EPDM
• Absolute pressure - Metric - US measuring range	0.6 ... 16 bar a (10 ... 232 psi abs a) 10 ... 300 psi a	Non-wetted parts materials	
Output		• Enclosure • Rack • Cables	Stainless steel, mat. No. 1.4404 (SST 316 L) Plastic PVC
Current signal	4 ... 20 mA	Certificates and approvals	
• Load • Auxiliary power U_B	(U _B - 10 V)/0.02 A DC 7 ... 33 V (10 ... 30 V for Ex)	Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
Voltage signal	0 ... 10 V DC	Lloyd's Register of Shipping (LR) ¹⁾	12/20010
• Load • Auxiliary power U_B • Power consumption	≥ 10 k Ω 12 ... 33 V DC < 7 mA at 10 k Ω	Germanischer Lloyd (GL) ¹⁾	GL19740 11 HH00
Ratiometric output	0 ... 90 %	American Bureau of Shipping (ABS) ¹⁾	ABS_11_HG 789392_PDA
• Load • Auxiliary power U_B • Power consumption	≥ 10 k Ω 5 V DC $\pm 10\%$ < 7 mA at 10 k Ω	Bureau Veritas (BV) ¹⁾	BV 271007A0 BV
Characteristic curve	Linear rising	Det Norske Veritas (DNV) ¹⁾	A 12553
Measuring accuracy		Drinking water approval (ACS) ¹⁾	ACS 15 ACC NY 360
Error in measurement at limit setting incl. hysteresis and reproducibility	• Typical: 0.25 % of measuring span • Maximum: 0.5 % of measuring span	EAC ¹⁾	№ TC RU C-DE.ГБ05.B.00732 OC НАННО «ЦБВЗ»
Step response time T ₉₉	< 5 ms	Underwriters Laboratories (UL) ¹⁾	UL 20110217 - E34453
Long-term stability		• for USA and Canada • worldwide	IEC UL DK 21845
• Lower range value and measuring span	0.25 % of measuring span/year	Explosion protection	
Influence of ambient temperature		Intrinsic safety "i" (only with current output)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIIC T125 °C Da/Db
• Lower range value and measuring span • Influence of power supply	0.25 %/10 K of measuring span 0.005 %/V	EC type-examination certificate	SEV 10 ATEX 0146
Operating conditions		Connection to certified intrinsically-safe resistive circuits with maximum values:	U _i $\leq$ 30 V DC; I _i $\leq$ 100 mA; P _i $\leq$ 0.75 W
Process temperature with gasket made of:		Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12	L _i = 0 nH; C _i = 0 nF
• FPM (Standard) • Neoprene • Perbunan • EPDM	-15 ... +125 °C (+5 ... +257 °F) -35 ... +100 °C (-31 ... +212 °F) -20 ... +100 °C (-4 ... +212 °F) -40 ... +125 °C (-40 ... +257 °F), usable for drinking water		
Ambient temperature	-25 ... +85 °C (-13 ... +185 °F)		
Storage temperature	-50 ... +100 °C (-58 ... +212 °F)		
Degree of protection (to EN 60529)	• IP 65 with connector per EN 175301-803-A • IP 67 with device plug M12 • IP 67 with cable • IP 67 with cable quick screw connection		

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

SITRANS P200 for gauge and absolute pressure

Selection and ordering data					Article No.		Order code	
SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications					7MF 1 5 6 5 -			
Characteristic curve deviation typ. 0.25 %								
Wetted parts materials: Ceramic and stainless steel + sealing material								
Non-wetted parts materials: stainless steel								
➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.								
Measuring range		Overload limit		Burst pressure				
		Min.	Max.					
For gauge pressure								
0 ... 1 bar	(0 ... 14.5 psi)	-1 bar (-14.5 psi)	2.5 bar (36.26 psi)	> 2.5 bar	(> 36.3 psi)	3BA		
0 ... 1.6 bar	(0 ... 23.2 psi)	-1 bar (-14.5 psi)	4 bar (58.02 psi)	> 4 bar	(> 58.0 psi)	3BB		
0 ... 2.5 bar	(0 ... 36.3 psi)	-1 bar (-14.5 psi)	6.25 bar (90.65 psi)	> 6.25 bar	(> 90.7 psi)	3BD		
0 ... 4 bar	(0 ... 58.0 psi)	-1 bar (-14.5 psi)	10 bar (145 psi)	> 10 bar	(> 145 psi)	3BE		
0 ... 6 bar	(0 ... 87.0 psi)	-1 bar (-14.5 psi)	15 bar (217 psi)	> 15 bar	(> 217 psi)	3BG		
0 ... 10 bar	(0 ... 145 psi)	-1 bar (-14.5 psi)	25 bar (362 psi)	> 25 bar	(> 362 psi)	3CA		
0 ... 16 bar	(0 ... 232 psi)	-1 bar (-14.5 psi)	40 bar (580 psi)	> 40 bar	(> 580 psi)	3CB		
0 ... 25 bar	(0 ... 363 psi)	-1 bar (-14.5 psi)	62.5 bar (906 psi)	> 62.5 bar	(> 906 psi)	3CD		
0 ... 40 bar	(0 ... 580 psi)	-1 bar (-14.5 psi)	100 bar (1450 psi)	> 100 bar	(> 1450 psi)	3CE		
0 ... 60 bar	(0 ... 870 psi)	-1 bar (-14.5 psi)	150 bar (2175 psi)	> 150 bar	(> 2175 psi)	3CG		
Other version, add Order code and plain text: Measuring range: ... up to... bar (psi)					9AA		H 1 Y	
For absolute pressure								
0 ... 0.6 bar a	(0 ... 8.7 psi a)	0 bar a (0 psi a)	2.5 bar a (36.26 psi a)	> 2.5 bar a	(> 36.3 psi a)	5AG		
0 ... 1 bar a	(0 ... 14.5 psi a)	0 bar a (0 psi a)	2.5 bar a (36.26 psi a)	> 2.5 bar a	(> 36.3 psi a)	5BA		
0 ... 1.6 bar a	(0 ... 23.2 psi a)	0 bar a (0 psi a)	4 bar a (58.02 psi a)	> 4 bar a	(> 58.0 psi a)	5BB		
0 ... 2.5 bar a	(0 ... 36.3 psi a)	0 bar a (0 psi a)	6.25 bar a (90.65 psi a)	> 6.25 bar a	(> 90.7 psi a)	5BD		
0 ... 4 bar a	(0 ... 58.0 psi a)	0 bar a (0 psi a)	10 bar a (145 psi a)	> 10 bar a	(> 145 psi a)	5BE		
0 ... 6 bar a	(0 ... 87.0 psi a)	0 bar a (0 psi a)	15 bar a (217 psi a)	> 15 bar a	(> 217 psi a)	5BG		
0 ... 10 bar a	(0 ... 145 psi)	0 bar a (0 psi a)	25 bar a (362 psi a)	> 25 bar a	(> 362 psi a)	5CA		
0 ... 16 bar a	(0 ... 232 psi)	0 bar a (0 psi a)	40 bar a (580 psi a)	> 40 bar a	(> 580 psi a)	5CB		
Other version, add Order code and plain text: Measuring range: ... up to ... mbar a (psi a)					9AA		H 2 Y	
Measuring ranges for gauge pressure								
0 ... 15 psi	-14.5 psi	35 psi	> 35 psi	4BB				
3 ... 15 psi	-14.5 psi	35 psi	> 35 psi	4BC				
0 ... 20 psi	-14.5 psi	50 psi	> 50 psi	4BD				
0 ... 30 psi	-14.5 psi	80 psi	> 80 psi	4BE				
0 ... 60 psi	-14.5 psi	140 psi	> 140 psi	4BF				
0 ... 100 psi	-14.5 psi	200 psi	> 200 psi	4BG				
0 ... 150 psi	-14.5 psi	350 psi	> 350 psi	4CA				
0 ... 200 psi	-14.5 psi	550 psi	> 550 psi	4CB				
0 ... 300 psi	-14.5 psi	800 psi	> 800 psi	4CD				
0 ... 500 psi	-14.5 psi	1400 psi	> 1400 psi	4CE				
0 ... 750 psi	-14.5 psi	2000 psi	> 2000 psi	4CF				
0 ... 1000 psi	-14.5 psi	2000 psi	> 2000 psi	4CG				
Other version, add Order code and plain text: Measuring range: ... up to ... psi					9AA		H 1 Y	
Measuring ranges for absolute pressure								
0 ... 10 psi a	0 psi a	35 psi a	> 35 psi a	6AG				
0 ... 15 psi a	0 psi a	35 psi a	> 35 psi a	6BA				
0 ... 20 psi a	0 psi a	50 psi a	> 50 psi a	6BB				
0 ... 30 psi a	0 psi a	80 psi a	> 80 psi a	6BD				
0 ... 60 psi a	0 psi a	140 psi a	> 140 psi a	6BE				
0 ... 100 psi a	0 psi a	200 psi a	> 200 psi a	6BG				
0 ... 150 psi a	0 psi a	350 psi a	> 350 psi a	6CA				
0 ... 200 psi a	0 psi a	550 psi a	> 550 psi a	6CB				
0 ... 300 psi a	0 psi a	800 psi a	> 800 psi a	6CC				
Other version, add Order code and plain text: Measuring range: ... up to ... psi a					9AA		H 2 Y	

Selection and ordering data	Article No.	Order code
SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications	7MF1565-	
Accuracy typ. 0.25 %		
Wetted parts materials: Ceramic and stainless steel + sealing material		
Non-wetted parts materials: stainless steel		
Output signal		
4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions)	0	
0 ... 10 V; three-wire system; power supply 12 ... 33 V DC	10	
0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC	20	
Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC ± 10 %	30	
Explosion protection (only 4 ... 20 mA)		
None	0	
With explosion protection Ex ia IIC T4	1	
Electrical connection		
Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling)	1	
Device plug M12 per IEC 61076-2-101	2	
Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i")	03	
Quickon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")	04	
Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling)	5	
Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling)	6	
Fixed mounted cable, length 5 m	07	
Special version	9	N1Y
Process connection		
G½" male per EN 837-1 (½" BSP male) (standard for metric pressure ranges mbar, bar)	A	
G½" male thread and G1/8" female thread	B	
G¼" male per EN 837-1 (¼" BSP male)	C	
7/16"-20 UNF male	D	
¼"-18 NPT male (standard for pressure ranges inH ₂ O and psi)	E	
¼"-18 NPT female	F	
½"-14 NPT male	G	
½"-14 NPT female	H	
7/16"-20 UNF female	J	
M20x1.5 male	P	
G1/4" to DIN 3852 Form E	Q	
G1/2" to DIN 3852 Form E	R	
Special version	Z	P1Y
Sealing material between sensor and enclosure		
Viton (FPM, standard)	A	
Neoprene (CR)	B	
Perbunan (NBR)	C	
EPDM	D	
Special version	Z	Q1Y
Version		
Standard version		1
Further designs		
Supplement the Article No. with "-Z" and add Order code.		
Quality test certificate, 5-point factory calibration (IEC 60770-2)	C11	
Oxygen version, free of oil and degreased, max. operating pressure 60 bar, max. temperature of medium +85 °C (only in conjunction with the sealing material Viton between sensor and enclosure and not with explosion protection version)	E10	


Pressure Measurement

Pressure transmitters


Single-range transmitters for general applications

SITRANS P200 for gauge and absolute pressure


Dimensional drawings

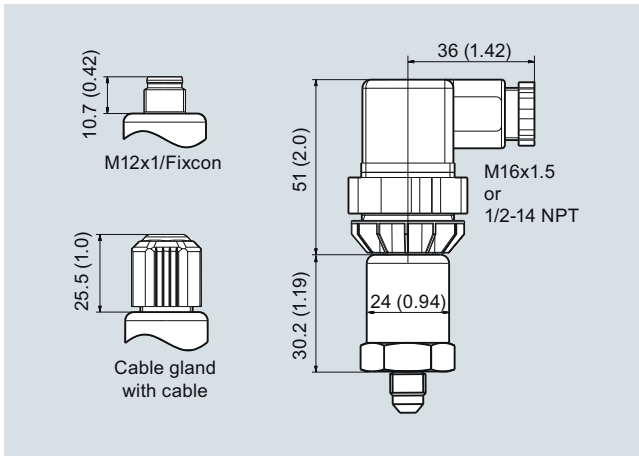


SITRANS P200, electrical connections, dimensions in mm (inch)

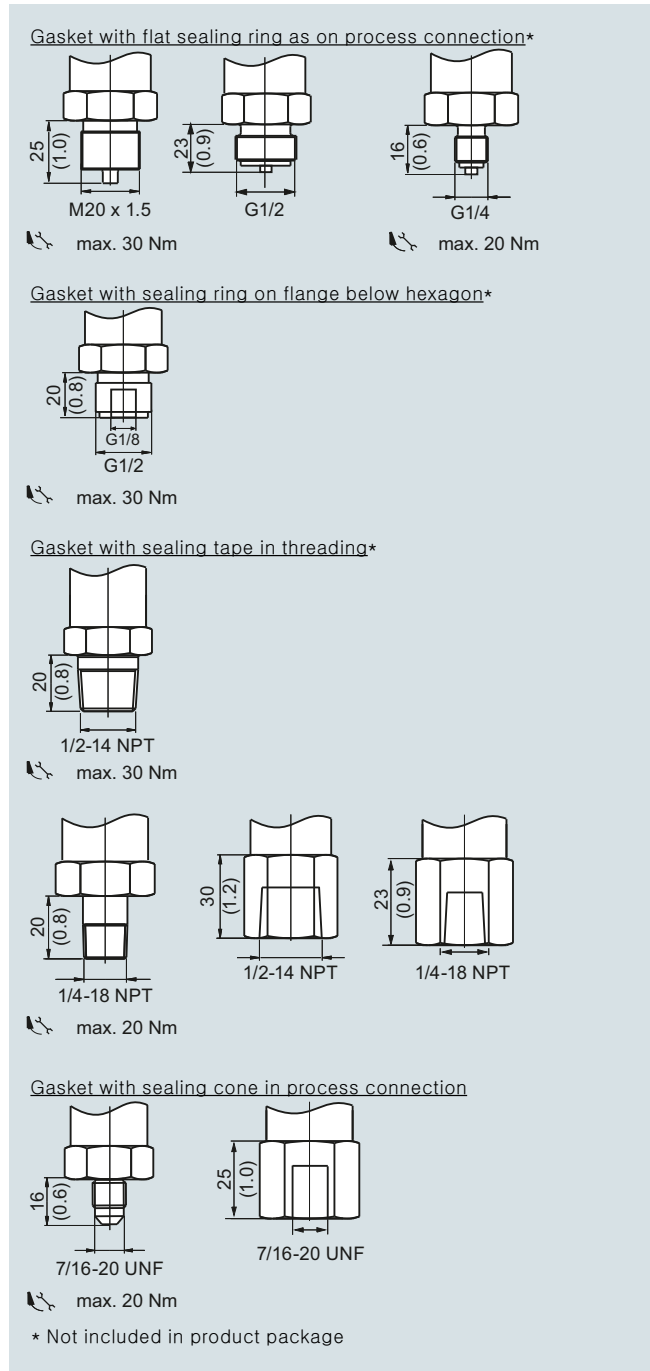


SITRANS P200, process connections, dimensions in mm (inch)

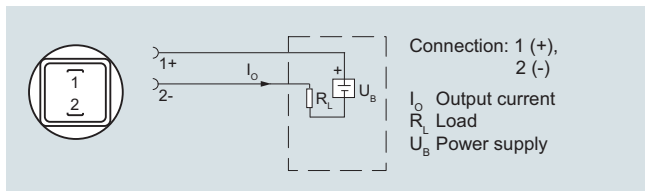Schematics


Connection with current output and connector per EN 175301

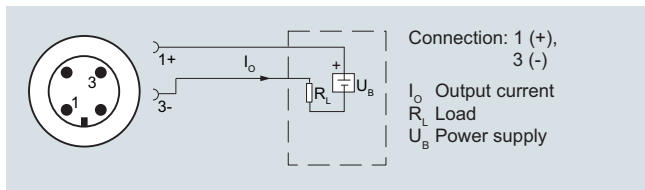


Connection with current output and device plug M12x1

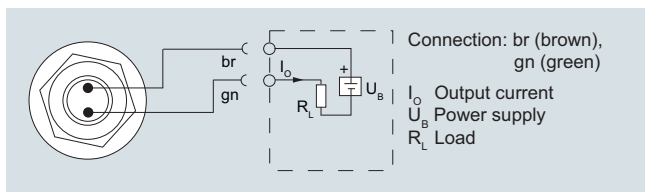


Connection with current output and cable

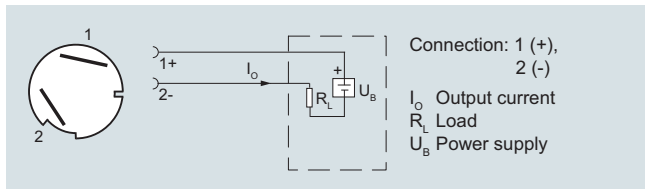


Connection with current output and Quickon cable quick screw connection

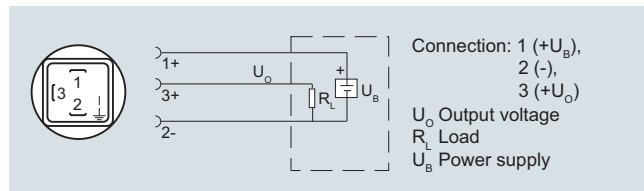


Connection with voltage output, ratiometric output and plug according to EN 175301

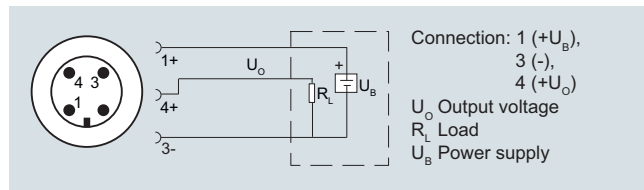

Connection with voltage output, ratiometric output and device plug M12x1

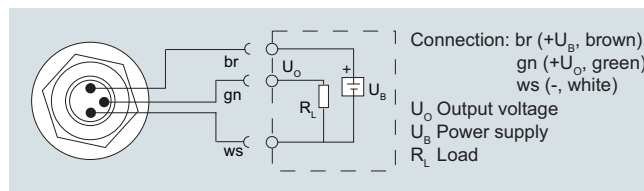


Connection with voltage output, ratiometric output and cable

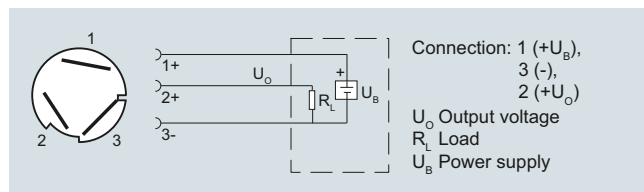


Connection with voltage output, ratiometric output and Quickon fast cable termination

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

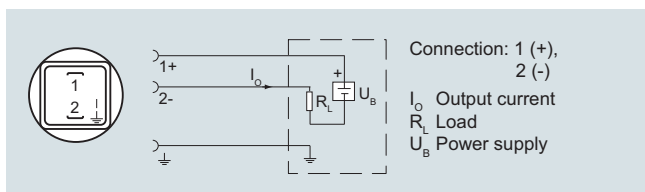

Connection with current output and connector per EN 175301 (Ex)

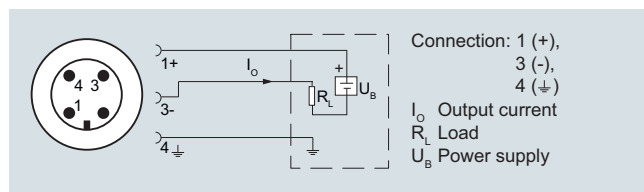

Connection with current output and device plug M12x1 (Ex)

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

SITRANS P210 for gauge pressure

1

Overview



The pressure transmitter SITRANS P210 measures the gauge pressure of liquids, gases and vapors.

- Stainless steel measuring cell
- Measuring ranges 100 to 600 mbar (1.45 to 8.7 psi) relative
- For low-pressure applications

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design

Application

The pressure transmitter SITRANS P210 for gauge pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design

Device structure without explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a device plug M12 (IP67), a cable (IP67) or a Quickon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.


Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a device plug M12 (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge pressure of liquids and gases as well as the level of liquids.

Mode of operation

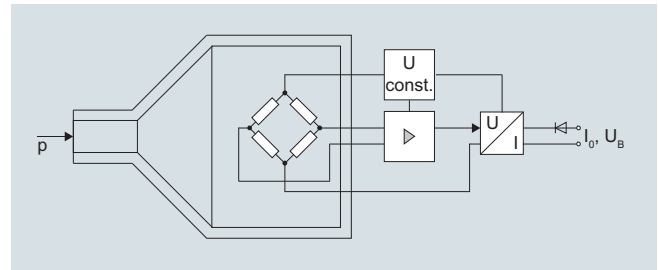

SITRANS P210 pressure transmitters (7MF1566-...), functional diagram

The stainless steel measuring cell has a thin-film resistance bridge to which the operating pressure p is transmitted through a stainless steel diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Technical specifications

Application		Design	
Gauge measurement	Liquids, gases and vapors	Weight	Approx. 0.090 kg (0.198 lb)
Mode of operation		Process connections	See dimension drawings
Measuring principle	Piezoresistive measuring cell (stainless steel diaphragm)	Electrical connections	- Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 - Device plug M12 2 or 3-wire (0.5 mm²) cable (Ø ± 5.4 mm) - Quickon cable quick screw connection
Measured variable	Gauge pressure		
Inputs			
Measuring range			
• Gauge pressure	100 ... 600 mbar (1.5 ... 8.7 psi)		
Output			
Current signal	4 ... 20 mA	Wetted parts materials	
• Load	(U _B - 10 V)/0.02 A	• Measuring cell	Stainless steel, mat.-No. 1.4435
• Auxiliary power U _B	DC 7 ... 33 V (10 ... 30 V for Ex)	• Process connection	Stainless steel, mat. No. 1.4404 (SST 316 L)
Voltage signal	0 ... 10 V DC	• Gasket	- FPM (Standard) - Neoprene - Perbunan - EPDM
• Load	≥ 10 kΩ		
• Auxiliary power U _B	12 ... 33 V DC		
• Power consumption	< 7 mA at 10 kΩ	Non-wetted parts materials	
Ratiometric output	0 ... 90 %	• Enclosure	Stainless steel, mat. No. 1.4404 (SST 316 L)
• Load	≥ 10 kΩ		
• Auxiliary power U _B	5 V DC ± 10 %	• Rack	Plastic
• Power consumption	< 7 mA at 10 kΩ	• cables	PVC
Characteristic curve	Linear rising		
Measuring accuracy		Certificates and approvals	
Error in measurement at limit setting incl. hysteresis and reproducibility	- Typical: 0.25 % of measuring span - Maximum: 0.5 % of measuring span	Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; meets requirements as per article 4, paragraph 3 (good engineering practice)
Step response time T ₉₉	< 5 ms	Lloyd's Register of Shipping (LR) ¹⁾	12/20010
Long-term stability		Germanischer Lloyd (GL) ¹⁾	GL19740 11 HH00
• Lower range value and measuring span	0.25 % of measuring span/year	American Bureau of Shipping (ABS) ¹⁾	ABS_11_HG 789392_PDA
Influence of ambient temperature		Bureau Veritas (BV) ¹⁾	BV 271007A0 BV
• Lower range value and measuring span	0.25 %/10 K of measuring span 0.5 %/10K of measuring span for a measuring range 100 ... 400 mbar	Det Norske Veritas (DNV) ¹⁾	A 12553
• Influence of power supply	0.005 %/V	Drinking water approval (ACS) ¹⁾	ACS 15 ACC NY 360
Operating conditions		EAC ¹⁾	№ TC RU C-DE.ГБ05.В.00732 OC НАННО «ЦБВЭ»
Process temperature with gasket made of:		Underwriters Laboratories (UL) ¹⁾	
• FPM (Standard)	-15 ... +125 °C (+5 ... +257 °F)	• for USA and Canada	UL 20110217 - E34453
• Neoprene	-35 ... +100 °C (-31 ... +212 °F)	• worldwide	IEC UL DK 21845
• Perbunan	-20 ... +100 °C (-4 ... +212 °F)		
• EPDM	-40 ... +125 °C (-40 ... +257 °F), usable for drinking water	Explosion protection	
Ambient temperature	-25 ... +85 °C (-13 ... +185 °F)	Intrinsic safety "i" (only with current output)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIIC T125 °C Da/Db
Storage temperature	-50 ... +100 °C (-58 ... +212 °F)	EC type-examination certificate	SEV 10 ATEX 0146
Degree of protection (to EN 60529)	- IP 65 with connector per EN 175301-803-A - IP 67 with device plug M12 - IP 67 with cable - IP 67 with cable quick screw connection	Connection to certified intrinsically-safe resistive circuits with maximum values:	U _i ≤ 30 V DC; I _i ≤ 100 mA; P _i ≤ 0.75 W
Electromagnetic compatibility	- acc. IEC 61326-1/-2/-3 - acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation ≤ 1 %	Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12	L _i = 0 nH; C _i = 0 nF
Mounting position	upright		

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

SITRANS P210 for gauge pressure

1

Selection and ordering data

SITRANS P 210 pressure transmitters for gauge pressure for low pressure applications

Accuracy typ. 0.25 %

Wetted parts materials: Stainless steel + sealing material

Non-wetted parts materials: stainless steel

[Click on the Article No. for the online configuration in the PIA Life Cycle Portal.](#)

Article No.

Order code

Measuring range

Overload limit

min.

max.

Burst pressure

For gauge pressure

0...100 mbar (1.45 psi)	-400 mbar (-5.8 psi)	400 mbar (5.8 psi)	1 bar (14.5 psi)
0...160 mbar (2.32 psi)	-400 mbar (-5.8 psi)	400 mbar (5.8 psi)	1 bar (14.5 psi)
0...250 mbar (3.63 psi)	-800 mbar (-11.6 psi)	1000 mbar (14.5 psi)	2 bar (29.0 psi)
0...400 mbar (5.8 psi)	-800 mbar (-11.6 psi)	1000 mbar (14.5 psi)	2 bar (29.0 psi)
0...600 mbar (8.7 psi)	-1000 mbar (-14.5 psi)	2000 mbar (29.0 psi)	3 bar (43.5 psi)

Other version, add Order code and plain text:

Measuring range: ... up to ... mbar (psi)

Output signal

4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions)

0 ... 10 V; three-wire system; power supply 12 ... 33 V DC

0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC

Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC $\pm$ 10 %

Explosion protection (only 4 ... 20 mA)

None

With explosion protection Ex ia IIC T4

Electrical connection

Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling)

Device plug M12 per IEC 61076-2-101

Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i")

Quickon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")

Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling)

Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling)

Fixed mounted cable, length 5 m

Special version

Process connection

G1/2" male per EN 837-1 (1/2" BSP male) (standard for metric pressure ranges mbar, bar)

G1/2" male thread and G1/8" female thread

G1/4" male per EN 837-1 (1/4" BSP male)

7/16"-20 UNF male

1/4"-18 NPT male (standard for pressure ranges inH₂O and psi)

1/4"-18 NPT female

1/2"-14 NPT male

1/2"-14 NPT female

7/16"-20 UNF female

M20x1.5 male

G1/4" to DIN 3852 Form E

G1/2" to DIN 3852 Form E

Special version

Sealing material between sensor and enclosure

Viton (FPM, standard)

Neoprene (CR)

Perbunan (NBR)

EPDM

Special version

Version

Standard version

Further designs

Supplement the Article No. with "-Z" and add Order code.

Quality test certificate, 5-point factory calibration (IEC 60770-2)

7MF1566 -

3AA

3AB

3AC

3AD

3AG

9AA

H1Y

0

10

20

30

0

1

1

2

0

3

0

4

5

6

0

7

9

N1Y

A

B

C

D

E

F

G

H

J

P

Q

R

Z

P1Y

A

B

C


D

Z


Q1Y

1

C11

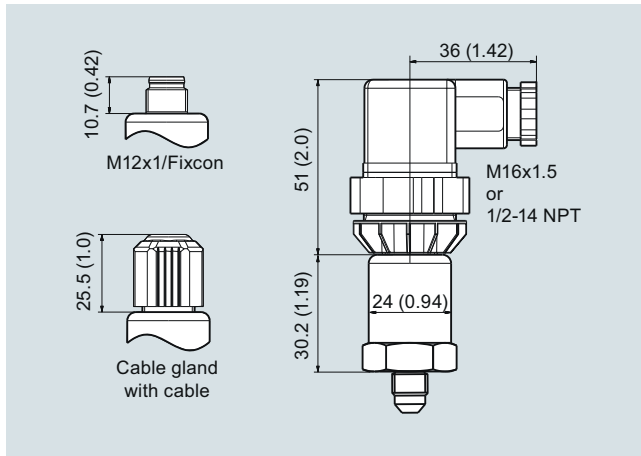Dimensional drawings

SITRANS P210, electrical connections, dimensions in mm (inch)

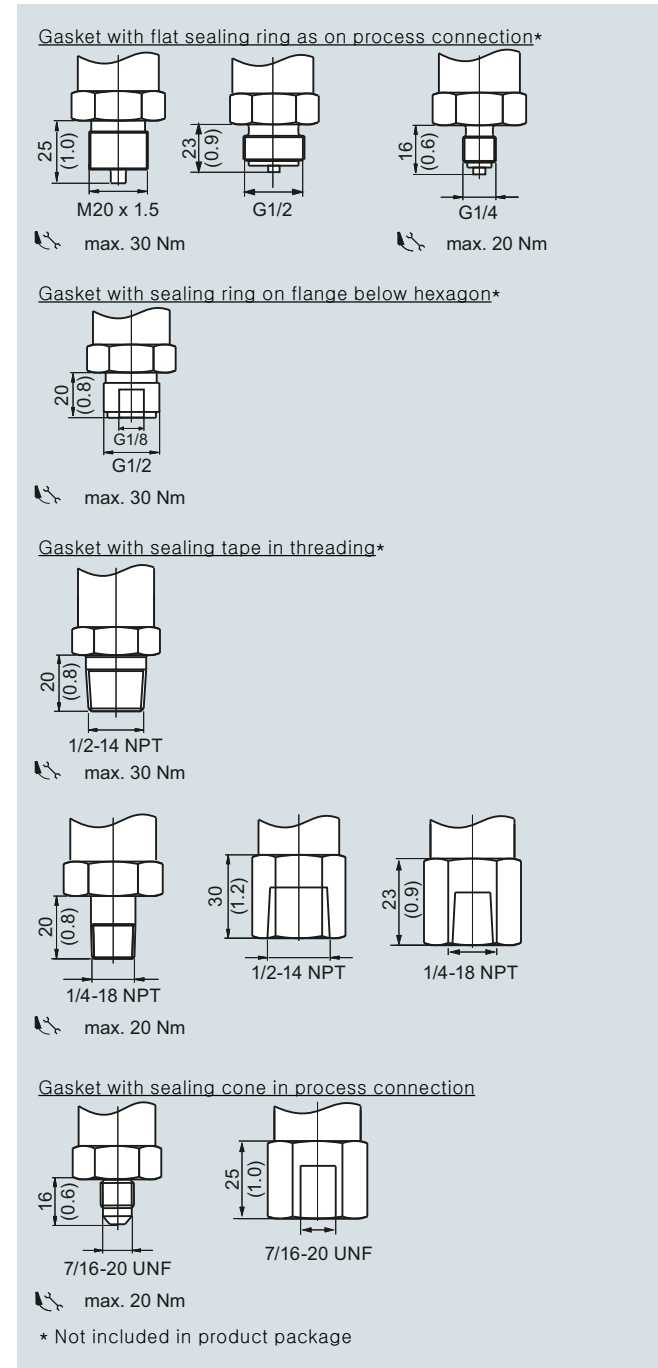

SITRANS P210, process connections, dimensions in mm (inch)


Pressure Measurement

Pressure transmitters


Single-range transmitters for general applications

SITRANS P210 for gauge pressure


Schematics

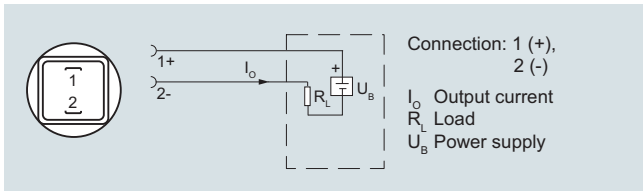


Connection with current output and connector per EN 175301

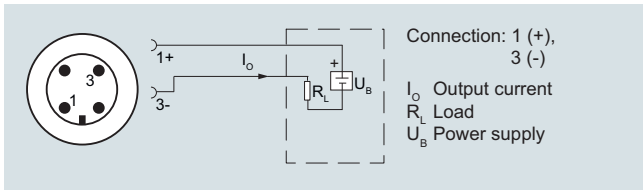


Connection with current output and device plug M12x1

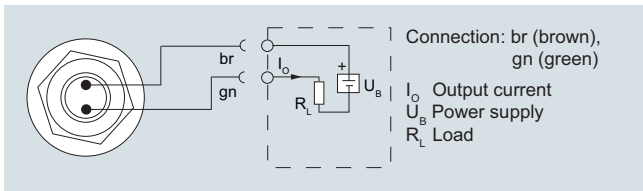


Connection with current output and cable

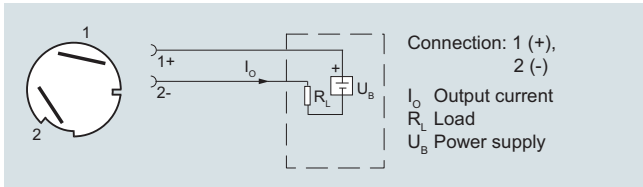


Connection with current output and Quickon cable quick screw connection

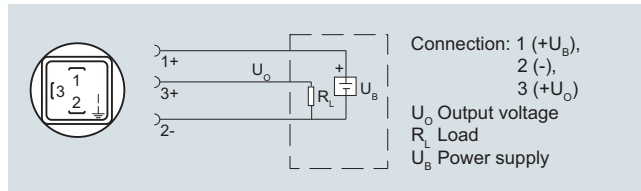


Connection with voltage output, ratiometric output and plug according to EN 175301

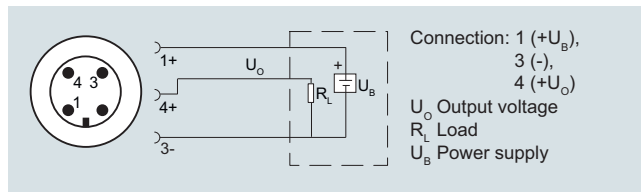

Connection with voltage output, ratiometric output and device plug M12x1

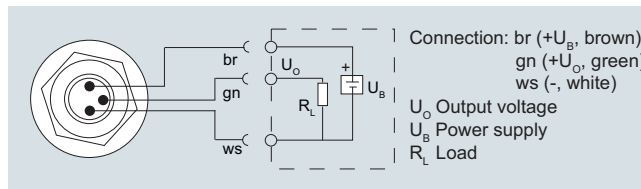


Connection with voltage output, ratiometric output and cable

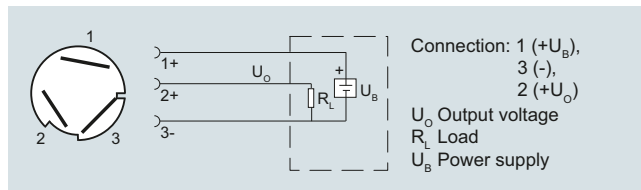


Connection with voltage output, ratiometric output and Quickon fast cable termination

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

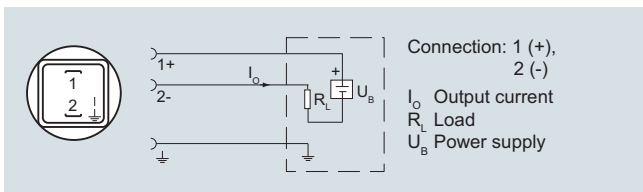

Connection with current output and connector per EN 175301 (Ex)

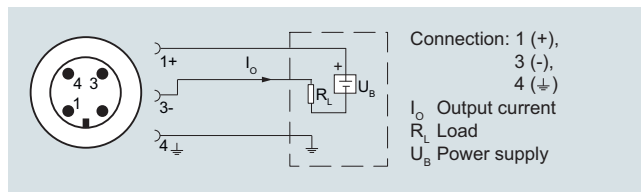

Connection with current output and device plug M12x1 (Ex)

Overview

The pressure transmitter SITRANS P220 measures the gauge pressure of liquids, gases and vapors.

- Stainless steel measuring cell, fully welded
- Measuring ranges 2.5 to 1000 bar (36.3 to 14500 psi) relative
- For high-pressure applications and refrigeration technology division

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design
- Gasket-less

Application

The pressure transmitter SITRANS P220 for gauge pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design**Device structure without explosion protection**


The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a device plug M12 (IP67), a cable (IP67) or a Quickon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.

Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a device plug M12 (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge pressure of liquids and gases as well as the level of liquids.

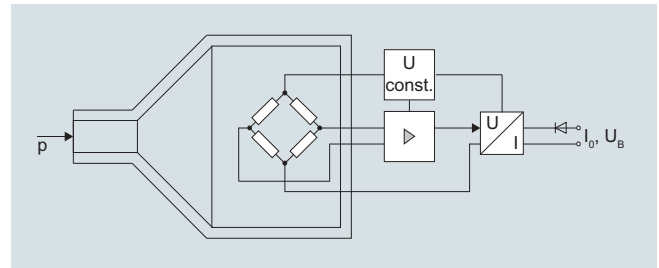Mode of operation

SITRANS P220 pressure transmitters (7MF1567-...), functional diagram

The stainless steel measuring cell has a thick-film resistance bridge to which the operating pressure p is transmitted through a stainless steel diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

SITRANS P220 for gauge pressure

1

Technical specifications

Application		Design	
Gauge pressure measurement	Liquids, gases and vapors	Weight	Approx. 0.090 kg (0.198 lb)
Mode of operation		Process connections	See dimension drawings
Measuring principle	Piezoresistive measuring cell (stainless steel diaphragm)	Electrical connections	- Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 - Device plug M12 2 or 3-wire (0.5 mm²) cable (Ø ± 5.4 mm) - Quickon cable quick screw connection
Measured variable	Gauge pressure	Wetted parts materials	
Inputs		- Measuring cell - Process connection	Stainless steel, mat.-No. 1.4016 Stainless steel, mat. No. 1.4404 (SST 316 L)
Measuring range		Non-wetted parts materials	
- Gauge pressure - Metric - US measuring range	2.5 ... 1000 bar (36 ... 14500 psi) 30... 14500 psi	Enclosure	Stainless steel, mat. No. 1.4404 (SST 316 L) Plastic PVC
Output		Certificates and approvals	
Current signal	4 ... 20 mA	Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
- Load - Auxiliary power U_B	(U _B - 10 V)/0.02 A DC 7 ... 33 V (10 ... 30 V for Ex)	Lloyd's Register of Shipping (LR) ¹⁾	12/20010
Voltage signal	0 ... 10 V DC	Germanischer Lloyd (GL) ¹⁾	GL19740 11 HH00
- Load - Auxiliary power U_B - Power consumption	≥ 10 kΩ 12 ... 33 V DC < 7 mA at 10 kΩ	American Bureau of Shipping (ABS) ¹⁾	ABS_11_HG 789392_PDA
Ratiometric output	0 ... 90 %	Bureau Veritas (BV) ¹⁾	BV 271007A0 BV
- Load - Auxiliary power U_B - Power consumption	≥ 10 kΩ 5 V DC ± 10 % < 7 mA at 10 kΩ	Det Norske Veritas (DNV) ¹⁾	A 12553
Characteristic curve	Linear rising	Drinking water approval (ACS) ¹⁾	ACS 15 ACC NY 360
Measuring accuracy		EAC ¹⁾	№ TC RU C-DE.ГБ05.В.00732 ОС НАННО «ЦСВЭ»
Error in measurement at limit setting incl. hysteresis and reproducibility	- Typical: 0.25 % of measuring span - Maximum: 0.5 % of measuring span	CRN ²⁾	0F18659.5C
Step response time T ₉₉	< 5 ms	Underwriters Laboratories (UL) ¹⁾	UL 20110217 - E34453
Long-term stability		- for USA and Canada - worldwide	IEC UL DK 21845
Lower range value and measuring span	0.25 % of measuring span/year	Explosion protection	
Influence of ambient temperature		Intrinsic safety "i" (only with current output)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIIC T125 °C Da/Db
- Lower range value and measuring span - Influence of power supply	0.25 %/10 K of measuring span 0.005 %/V	EC type-examination certificate	SEV 10 ATEX 0146
Operating conditions		Connection to certified intrinsically-safe resistive circuits with maximum values:	U _i ≤ 30 V DC; I _i ≤ 100 mA; P _i ≤ 0.75 W
- Process temperature - Ambient temperature - Storage temperature - Degree of protection (to EN 60529)	-40 ... +120 °C (-40 ... +248 °F) -25 ... +85 °C (-13 ... +185 °F) -50 ... +100 °C (-58 ... +212 °F)	Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12	L _i = 0 nH; C _i = 0 nF
		CSA ²⁾	70006348
			Class I, Division I, Groups A, B, C and D; Class II, Division 1, Groups E, F and G, Class III
			Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G, Class III
			A/Ex ia IIC T4 Ga/Gb A/Ex ia IIIC T125°C Da/Db
Electromagnetic compatibility			

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.

²⁾ See ordering data for available versions.

Selection and ordering data

Article No.

Order code

SITRANS P 220 pressure transmitters for gauge pressure, high-pressure and refrigeration applications, fully-welded version

Accuracy typ. 0.25 %

Wetted parts materials: stainless steel

Non-wetted parts materials: stainless steel

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Measuring range		Overload limit		Burst pressure	
		Mini- mum	Max.		
For gauge pressure					
0 ... 2.5 bar	(0 ... 36.3 psi)	-1 bar	(-14.5 psi)	6.25 bar	(90.7 psi)
0 ... 4 bar	(0 ... 58 psi)	-1 bar	(-14.5 psi)	10 bar	(145 psi)
0 ... 6 bar	(0 ... 87 psi)	-1 bar	(-14.5 psi)	15 bar	(217 psi)
0 ... 10 bar	(0 ... 145 psi)	-1 bar	(-14.5 psi)	25 bar	(362 psi)
0 ... 16 bar	(0 ... 232 psi)	-1 bar	(-14.5 psi)	40 bar	(580 psi)
0 ... 25 bar	(0 ... 363 psi)	-1 bar	(-14.5 psi)	62.5 bar	(906 psi)
0 ... 40 bar	(0 ... 580 psi)	-1 bar	(-14.5 psi)	100 bar	(1450 psi)
0 ... 60 bar	(0 ... 870 psi)	-1 bar	(-14.5 psi)	150 bar	(2175 psi)
0 ... 100 bar	(0 ... 1450 psi)	-1 bar	(-14.5 psi)	250 bar	(3625 psi)
0 ... 160 bar	(0 ... 2320 psi)	-1 bar	(-14.5 psi)	400 bar	(5801 psi)
0 ... 250 bar	(0 ... 3625 psi)	-1 bar	(-14.5 psi)	625 bar	(9064 psi)
0 ... 400 bar	(0 ... 5801 psi)	-1 bar	(-14.5 psi)	1000 bar	(14503 psi)
0 ... 600 bar	(0 ... 8702 psi)	-1 bar	(-14.5 psi)	1500 bar	(21755 psi)
0 ... 1000 bar	(0 ... 14500 psi)	-1 bar	(-14.5 psi)	1500 bar	(21755 psi)

Other version, add Order code and plain text:

Measuring range: ... up to ... bar (psi)

Measuring ranges for gauge pressure

0 ... 30 psi	-14.5 psi	75 psi	360 psi	★
0 ... 60 psi	-14.5 psi	150 psi	580 psi	★
0 ... 100 psi	-14.5 psi	250 psi	580 psi	★
0 ... 150 psi	-14.5 psi	375 psi	870 psi	★
0 ... 200 psi	-14.5 psi	500 psi	1390 psi	★
0 ... 300 psi	-14.5 psi	750 psi	2170 psi	★
0 ... 500 psi	-14.5 psi	1250 psi	3481 psi	★
0 ... 750 psi	-14.5 psi	1875 psi	5220 psi	★
0 ... 1000 psi	-14.5 psi	2500 psi	5220 psi	★
0 ... 1500 psi	-14.5 psi	3750 psi	8700 psi	★
0 ... 2000 psi	-14.5 psi	5000 psi	13920 psi	★
0 ... 3000 psi	-14.5 psi	7500 psi	21750 psi	★
0 ... 5000 psi	-14.5 psi	12500 psi	34800 psi	★
0 ... 6000 psi	-14.5 psi	15000 psi	34800 psi	★
0 ... 8700 psi	-14.5 psi	21755 psi	52200 psi	★
0 ... 14500 psi	-14.5 psi	21755 psi	72520 psi	★

Other version, add Order code and plain text: Measuring range: ... up to ... psi

Output signal

4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions)

0 ... 10 V; three-wire system; power supply 12 ... 33 V DC

0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC

Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC ± 10 %

Explosion protection (only 4 ... 20 mA)

None

With explosion protection Ex ia IIC T4

Electrical connection

Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling) ★

Device plug M12 per IEC 61076-2-101

Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i")

Quickon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")

Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling) ★

Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling) ★

Fixed mounted cable, length 5 m

Special version

★ Order code E21 required for complete configuration with CRN and cCSA_{US} Ex approval.

Pressure Measurement

Pressure transmitters

Single-range transmitters for general applications

1

SITRANS P220 for gauge pressure

Selection and ordering data

SITRANS P 220 pressure transmitters for gauge pressure, high-pressure and refrigeration applications, fully-welded version

Accuracy typ. 0.25 %

Wetted parts materials: stainless steel

Non-wetted parts materials: stainless steel

Process connection

G½" male per EN 837-1 (½" BSP male) (standard for metric pressure ranges mbar, bar)

G½" male thread and G1/8" female thread

G¼" male per EN 837-1 (¼" BSP male)

7/16"-20 UNF male

¼"-18 NPT male (standard for pressure ranges inH₂O and psi) *

¼"-18 NPT female

½"-14 NPT male

½"-14 NPT female (Only for measuring ranges ≤ 60 bar (870 psi))

7/16"-20 UNF female

M20x1.5 male

G1/4" to DIN 3852 Form E

G1/2" to DIN 3852 Form E

Special version

Version

Standard version *

Further designs

Supplement the Article No. with "-Z" and add Order code.

Quality test certificate, 5-point factory calibration (IEC 60770-2)
(not possible for measuring ranges > 0 ... 600 bar/0 ... 8 702 psi)

Oxygen version, free of oil and degreased (not in conjunction with explosion protection version)

With CRN and cCSA_{US} Ex approval (only for measuring ranges 0 ... 30 psi bis 0 ... 8 700 psi)* Order code E21 required for complete configuration with CRN and cCSA_{US} Ex approval..

Article No.

Order code

7MF1567-

A

A

B

C

D

E

F

G

H

J

P

Q

R

Z


P1Y

1


C11

E10

E21

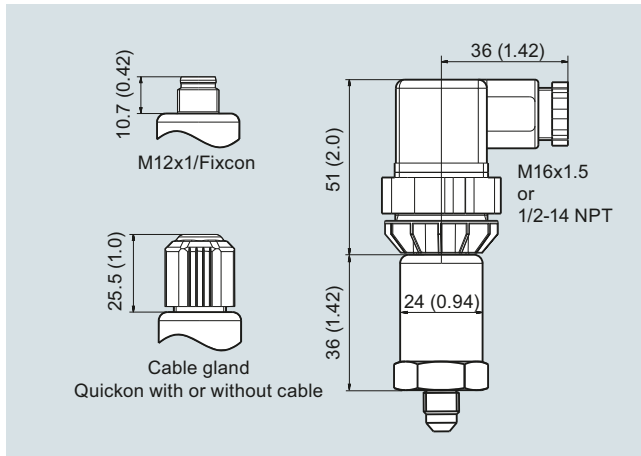Dimensional drawings

SITRANS P220, electrical connections, dimensions in mm (inch)

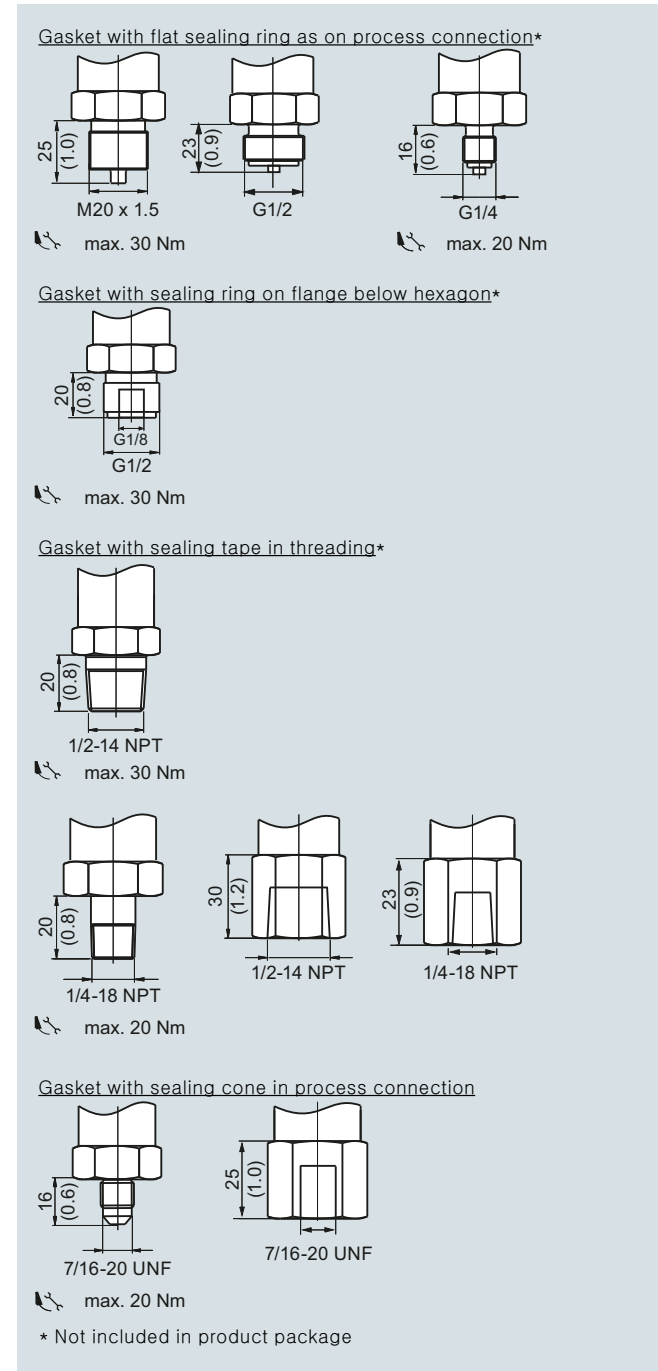

SITRANS P220, process connections, dimensions in mm (inch)


Pressure Measurement

Pressure transmitters


Single-range transmitters for general applications

SITRANS P220 for gauge pressure


Schematics

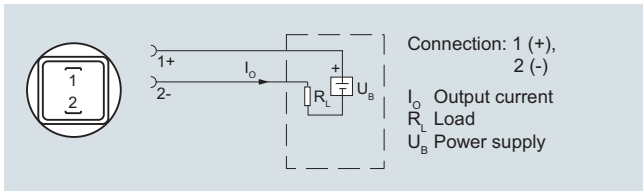


Connection with current output and connector per EN 175301

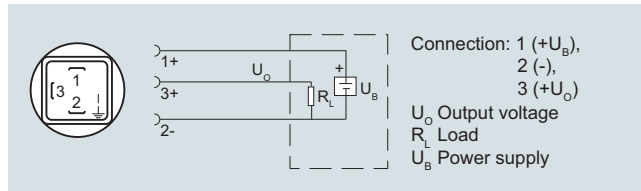


Connection with voltage output, ratiometric output and plug according to EN 175301

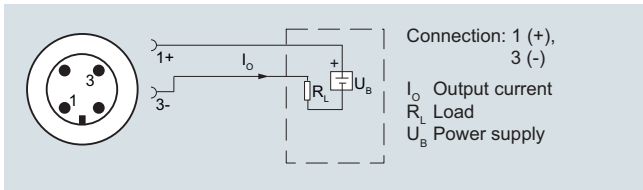


Connection with current output and device plug M12x1

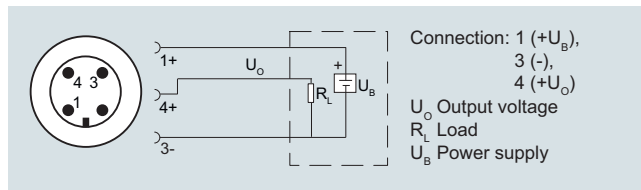


Connection with voltage output, ratiometric output and device plug M12x1

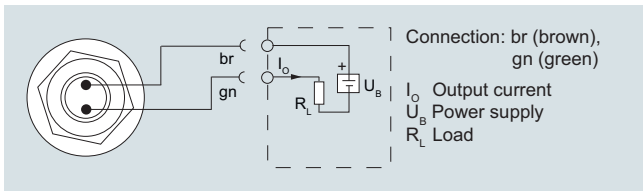


Connection with current output and cable

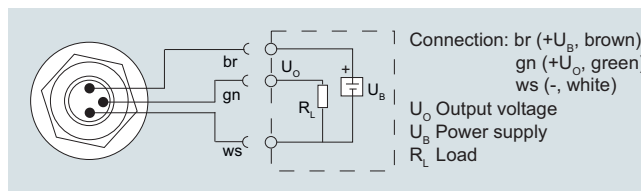

Connection with voltage output, ratiometric output and cable

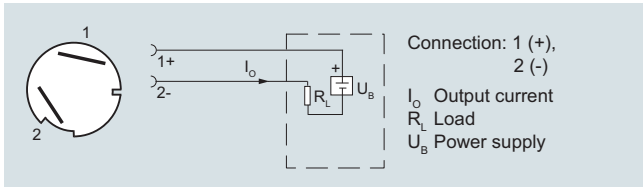


Connection with current output and cable quick screw connection Quick-on

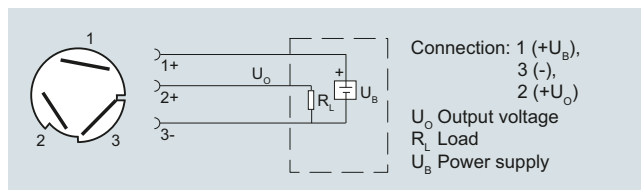


Connection with voltage output, ratiometric output and Quickon fast cable termination

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

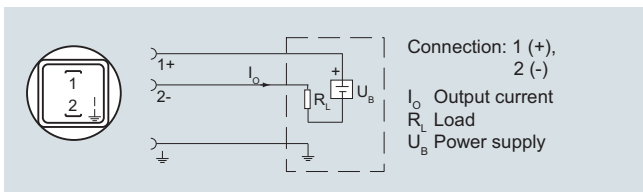

Connection with current output and connector per EN 175301 (Ex)

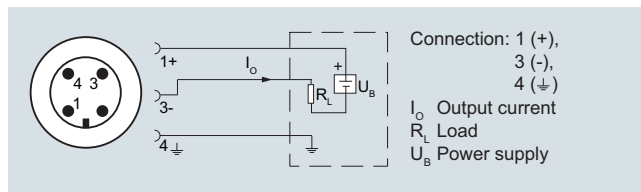

Connection with current output and device plug M12x1 (Ex)

SEITA

Servicios Especializados de Ingeniería
en Tecnología y Automatización

www.seita.com.co